



F IP64


Beam Angle  
30°/60°

**CITIZEN**  
Micro HumanTech

Model: RAV1001-CLC101P

Input Voltage: AC 110V~265V 50/60Hz  
Power Rating: 10W  
Lumens: 750lm~850lm  
Ra>80

5% 100%  
Dimmable Range  
Cut Out  
Φ75mm

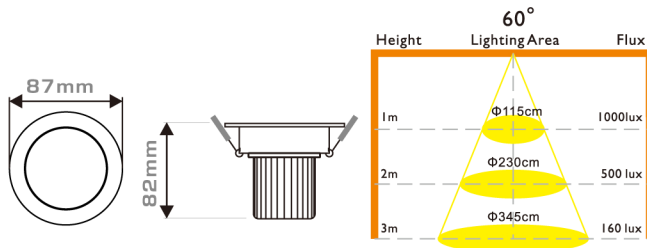

F IP64


Beam Angle  
30°/60°

**CREE**

Model: RAV1201-CLC101P

Input Voltage: AC 110V~265V/ 50/60Hz  
Power Rating: 15W  
Lumens: 1050lm~1200lm  
Ra>80

5% 100%  
Dimmable Range  
Cut Out  
Φ92mm

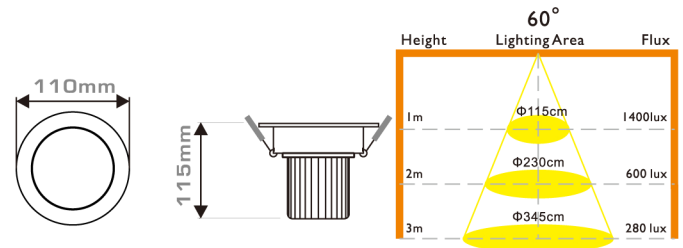


Beam Angle  
30°/60°

**EPISTAR**

Model: RAV1201-CLC104

Input Voltage: AC 110V~265V 50/60Hz  
Power Rating: 15W  
Lumens: 1050lm~1200lm  
Twist Angle: 45°  
Ra>80

5% 100%  
Dimmable Range  
Cut Out  
Φ92mm

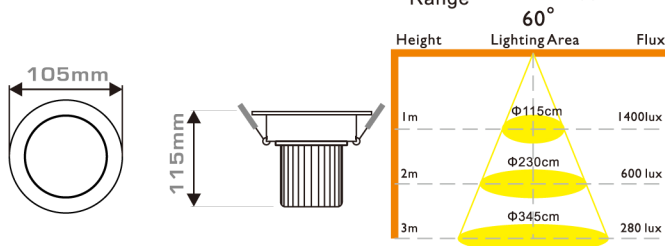

Beam Angle  
30°/60°

**CITIZEN**  
Micro HumanTech  
**EPISTAR**

Model: RAV1201-CLC2001/3501/5001

Input Voltage: AC 110V~265V 50/60Hz  
Power Rating: 20W/35W/50W  
Lumens: 1450lm~1600lm/2000lm~2300lm/4000lm~4200lm  
Twist Angle: 25°  
Ra>80

10% 100%  
Dimmable Range  
Cut Out  
Φ135mm

